


Dimensions Max 6500 (w) x 2600mm (h)

WIDTH (MM)		HEIGHT (MM) including cill if required	
-------------------	--	---	--

Configuration (When viewed from outside) *Drainage tray recommended

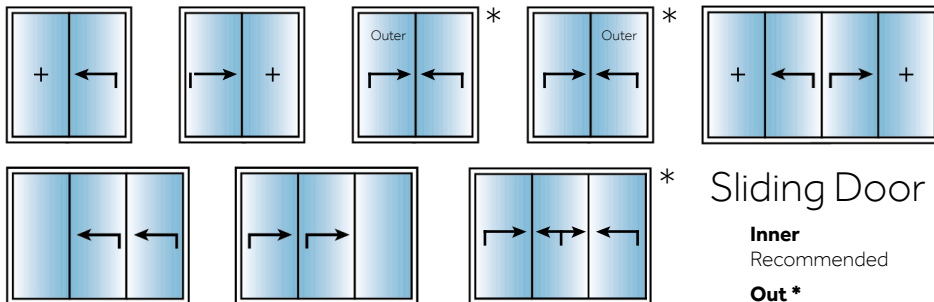

THRESHOLD	DRAINAGE TRAY	
	*With	Without
Low Threshold with Ramp Not available on triple track	N/A	
Standard Frame		
Standard Frame with Nose		

*Recommended

THRESHOLD	EXT	INT
Pure White 9010 Matt		
Hipca Gloss White 9010		
Anthracite Grey 7016 Matt		
Jet Black 9005 Matt		
Cream 9001 Matt		
Agate Grey 7038 Matt		
Squirrel Grey 7000 Matt		
Pastel Turquoise 6034 Matt		
Chocolate Brown 8017 Matt		
Silver Metallic Effect		
Mid Bronze Metallic Effect		
Black Metallic Effect		
Bespoke / Foiled Finishes		

FRAME EXTENSIONS	TOP	LEFT	RIGHT
(When viewed from outside)			
25mm			

OPTIONS	
Trickle Vents 25mm frame extension required. 2 x vents split equally as standard	
Head Drip	

UPGRADES	
(Both can be fitted and are recommended for extra large door sashes over 1200kg / 2300kg)	
Drop Assist ¹	
Lift Assist ²	

SASH STYLE	
Architectural	
Heritage	

GLAZING	
28mm DG 1.4 U-value	
36mm TG 1.1 U-value	
44mm TG 1.0 U-value Contemporary only	
Laminated	
Unglazed Still tick which glazing units you will use	

Figures are whole door U-values based on Part L standard configurations

SLIM INTERLOCK OPTIONS	
Standard 80mm	
Slim 52mm *Not available on 3 Pane option	

MAIN HANDLE FINISH	

Handle options:
White, Black, Silver

DOOR HARDWARE	
Handle Internal with Finger Grip External Standard with 50/10 cylinder	
Handle Internal and External with 50/50 cylinder	

INTEGRAL BLINDS	
White	
Black	
Anthracite	
Pearl Grey	
No Blinds	

ENQUIRY SOURCE

Installation Address

House Name/Number:

Street:

Town:

Postcode:

TO ORDER OR REQUEST A QUOTE
FOR A LIFT & SLIDE PATIO DOOR,
PLEASE FILL IN THIS FORM AND
EMAIL BACK TO:

sales@endurancealuminium.co.uk

QUOTE

ORDER

JOB DETAILS

Reference

Preferred delivery date

/ /

Notes

YOUR DETAILS

Name

Company

Contact number

Email

Signature

EXPLORE OUR HARDWARE RANGE

To view our full range of handles
and hardware options, scan this QR
Code with your Smartphone.






1. Low Threshold with Ramp
(25mm high) tested to the requirements of Part M
**Only available in double track*

2. Standard Outer Frame
(38mm high inside)
**Allow an additional 12mm if using optional drainage tray*


3. Standard Outer Frame
with Clip-on Cill Nose
(38mm high)
**Allow an additional 12mm if using optional drainage tray*

Threshold Options


1. LOW THRESHOLD WITH RAMP

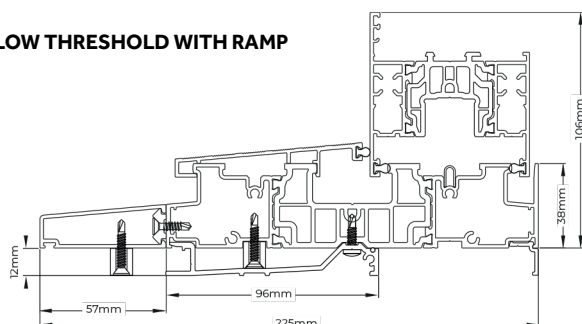


2. STANDARD OUTER FRAME

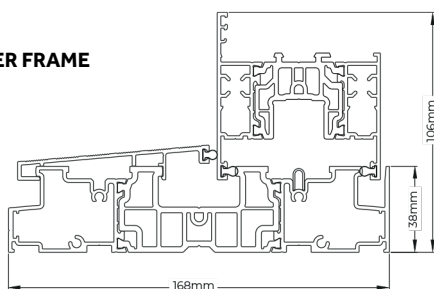

3. STANDARD OUTER FRAME WITH CLIP-ON CILL NOSE AND DRAINAGE TRAY

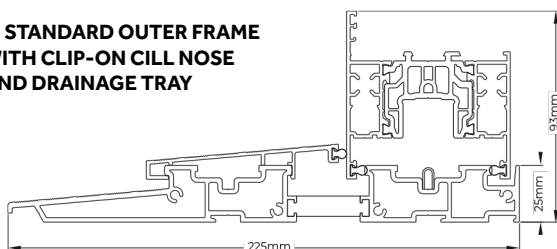


4. STANDARD 3-PANE OUTER FRAME WITH DRAINAGE TRAY

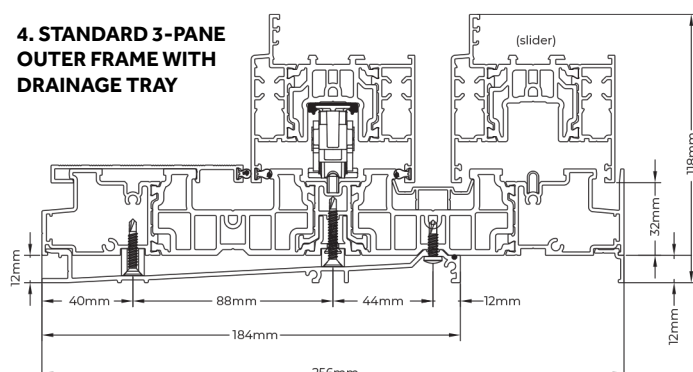

At a glance

- Double and Triple Track Options
- Max 6.5 x 2.5m
- Max 400kg Sash
- Slim 106mm Frame to Sash Sightline
- Standard 80mm Interlock Sightline
- Ultra Slim 52mm Interlock Option
Suitable for most twin track doors
- Up to 44mm Triple Glazing
36mm on stepped sashes

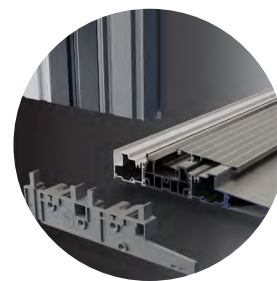

Square cut frames for easy assembly on site if required



Concealed buffers help dampen sash operation



Flush jambs prevent snagging and keep visual lines clean